

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 August 2005 (18.08.2005)

PCT

(10) International Publication Number  
**WO 2005/076016 A1**

(51) International Patent Classification<sup>7</sup>: **G01P 3/488**,  
G01D 5/16

(21) International Application Number:  
PCT/IB2004/052867

(22) International Filing Date:  
20 December 2004 (20.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
04100032.4 8 January 2004 (08.01.2004) EP

(71) Applicant (for DE only): **PHILIPS INTELLECTUAL  
PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-  
damm 94, 20099 Hamburg (DE).

(71) Applicant (for all designated States except DE, US):  
**KONINKLIJKE PHILIPS ELECTRONICS N. V.**  
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven  
(NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BUTZMANN, Ste-  
fan** [DE/DE]; c/o Philips Intellectual Property & Standards  
GmbH, Weisshausstr. 2, 52066 Aachen (DE).


(74) Agents: **VOLMER, Georg** et al.; Philips Intellectual  
Property & Standards GmbH, GmbH Weisshausstr. 2,  
52066 Aachen (DE).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: MAGNETORESISTIVE SPEED SENSOR

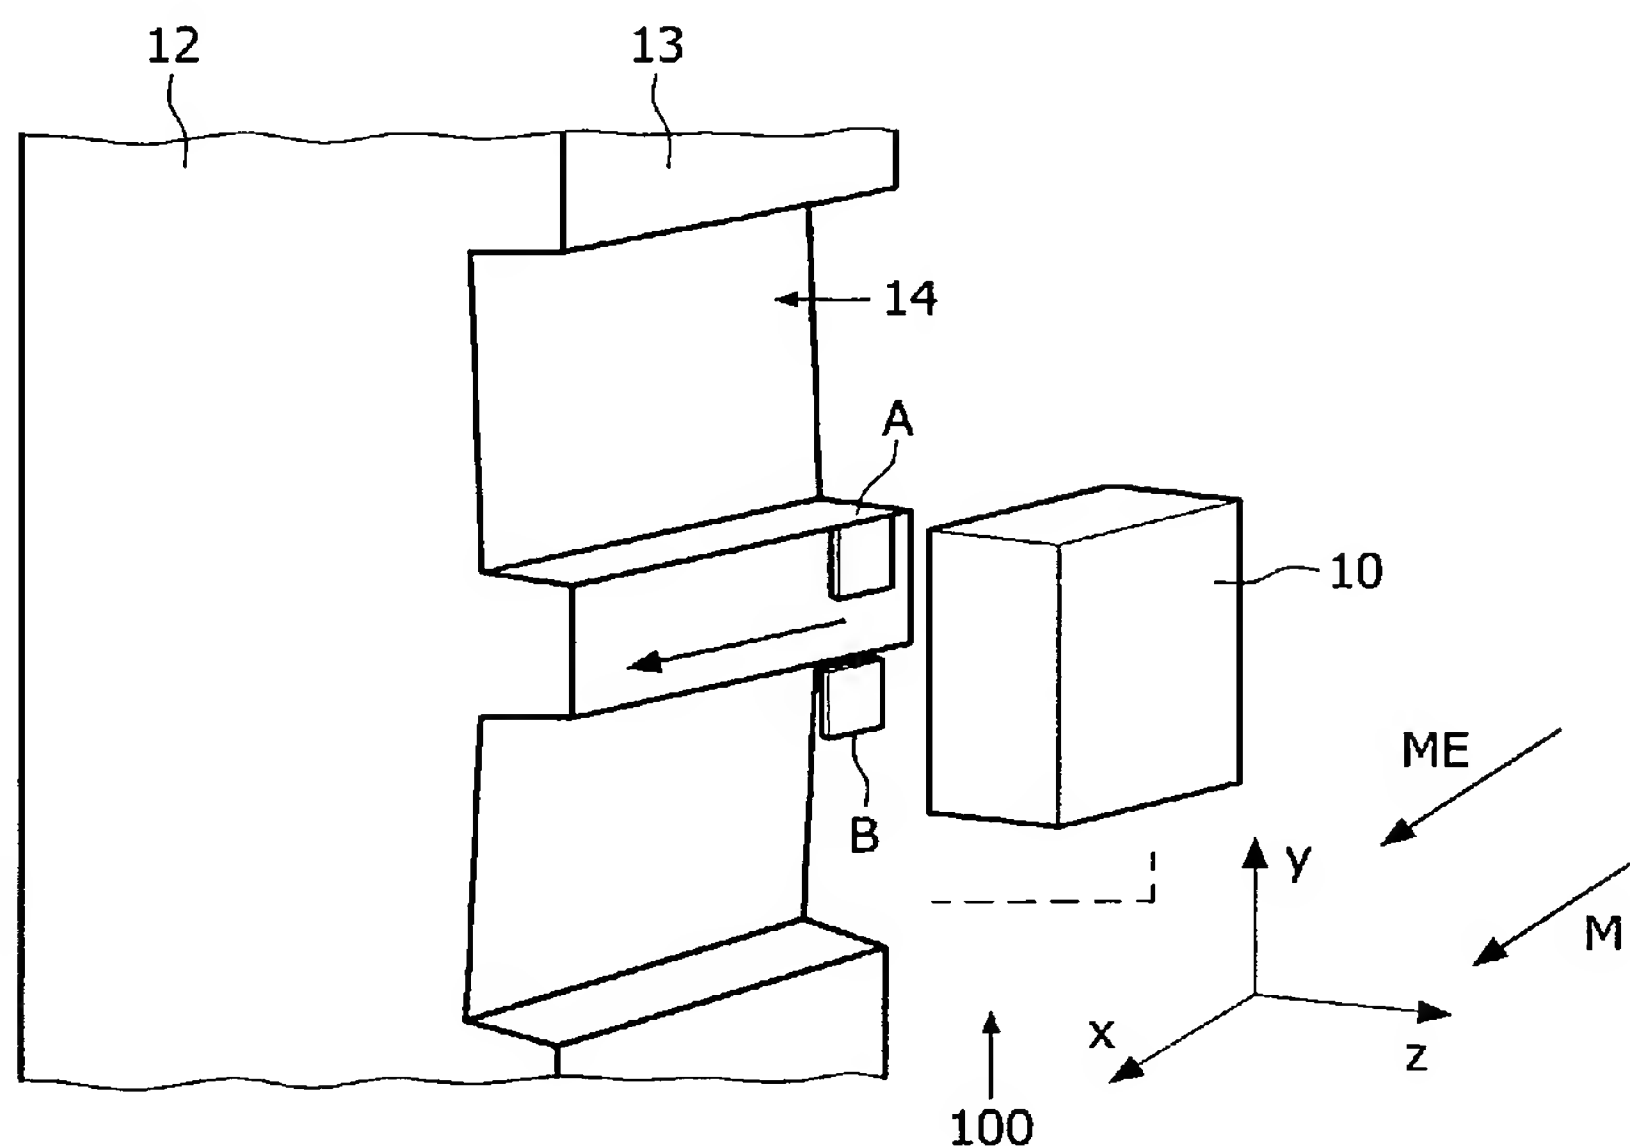

(57) Abstract: In order to create a magnetoresistive speed sensor (100) with a permanent magnet (10) and with a sensor (A, B) for a magnetic field for detecting the speed of an object rotating about an x-axis, wherein the magnetoresistive speed sensor (100) is equipped with a measuring direction (ME), in which an external magnetic interference field does not influence the measurement result, it is proposed that the measuring direction (ME) is aligned to be parallel with an x-direction and that two sensors (A, B) are disposed with displacement from one another and normal to the measuring direction (ME).

WO 2005/076016 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*